



# PicoScope<sup>®</sup> 4000 Series

HIGH-PRECISION USB OSCILLOSCOPES

For detailed waveforms and accurate measurements

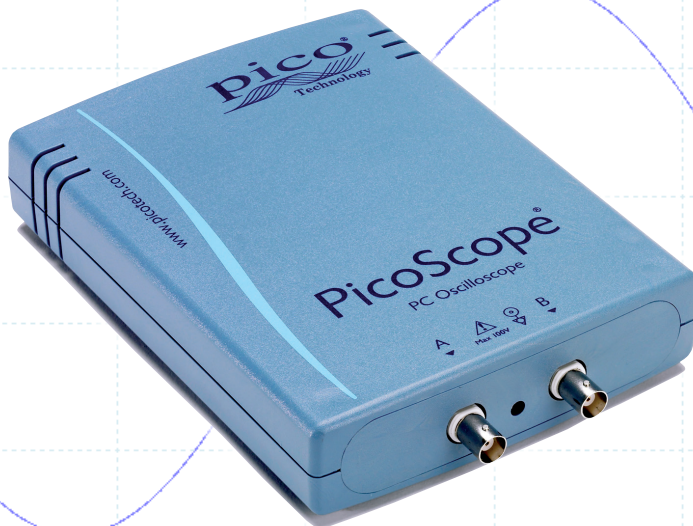

32 MS buffer  
12 bit resolution  
80 MS/s sampling  
20 MHz bandwidth  
2 or 4 channels  
2 channel IEPE model  
USB powered

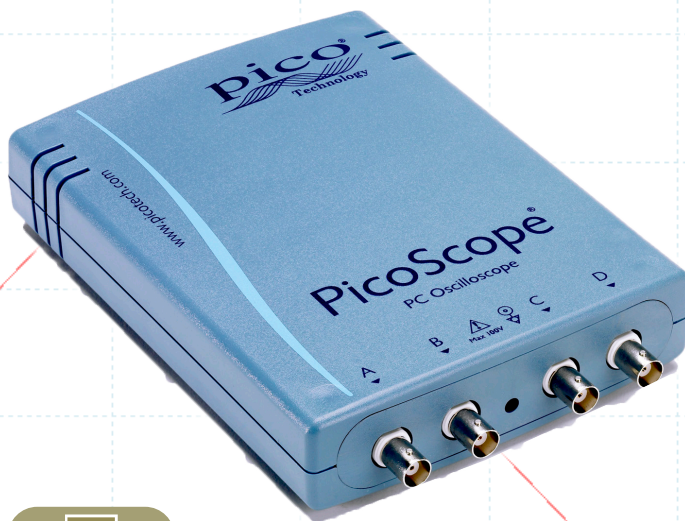



32 MS BUFFER  
12 BITS  
IEPE




- Free technical support • Free upgrades
- Supplied with SDK including example programs
  - Software compatible with Windows XP, Vista, 7 and 8

## PicoScope features at a glance


- 20 MHz oscilloscope and FFT spectrum analyzer
- 26 automatic measurements
- Mask limit testing with alarms
- Serial bus decoding
- Per-channel low-pass filtering
- Software resolution enhancement to 16 bits
- Math channels with basic and advanced functions
- Reference waveforms
- Waveform buffer with up to 10,000 segments and overview window
- Digital color and analog intensity persistence display modes
- XY mode

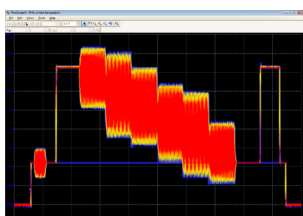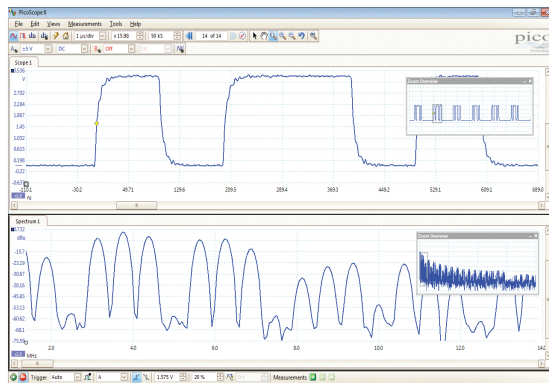


Oscilloscope

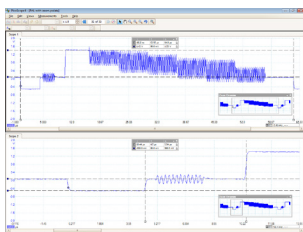


Quick and powerful zoom

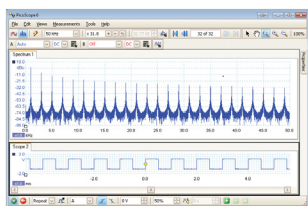


Spectrum analyzer

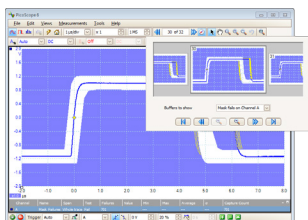

Mask limit testing

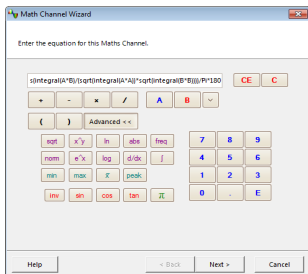

Math channels

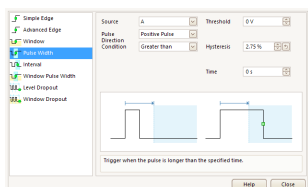

Advanced triggers

## All-in-one instruments

The PicoScope 4000 Series PC Oscilloscopes are extremely versatile, with an oscilloscope and spectrum analyzer included in every model.

## PicoScope 4224 IEPE

The 2-channel IEPE version is compatible with industry-standard IEPE (integrated electronics piezoelectric) accelerometers and microphones, making it suitable for a variety of measurement applications including noise and vibration analysis.

## Convenience and speed

The PicoScope 4000 Series scopes obtain their power from the USB 2.0 interface, so there's no need for an external power supply. The USB port also delivers high-speed data to your PC to give you a responsive, high-resolution display. A maximum sampling rate of 80 MS/s is combined with a high resolution of 12 bits, giving you 16 times better vertical resolution than most standard scopes.

## Deep memory

The 32 M sample buffer is 'always on'. There is never a compromise between buffer size and waveform update rate, because the PicoScope 4000 Series always maximises both at the same time. Now you can capture every waveform with full detail without having to think about it.

## Advanced software

The scopes are bundled with the latest version of PicoScope for Windows. PicoScope is easy to use and can export data in a variety of graphical, text and binary formats. Also included are Windows drivers and example programs.

## Mask limit testing

PicoScope allows you to draw a mask around any signal with user-defined tolerances. This has been designed specifically for production and debugging environments, enabling you to compare signals. Simply capture a known good signal, draw a mask around it, and then attach the system under test. PicoScope will capture any intermittent glitches and can show a failure count and other statistics in the Measurements window.

The numerical and graphical mask editors can be used separately or in combination, allowing you to enter accurate mask specifications, modify existing masks, and import and export masks as files.


## Math channels

With PicoScope you can perform a variety of mathematical calculations on your input signals and reference waveforms.

Use the built-in list for simple functions such as addition and inversion, or open the equation editor and create complex functions involving trigonometry, exponentials, logarithms, statistics, integrals and derivatives.

## Advanced triggers

As well as the standard range of triggers found on most oscilloscopes, the PicoScope 4000 Series offers one of the best selections of advanced triggers available. These include pulse width, windowed and dropout triggers to help you find and capture your signal quickly.

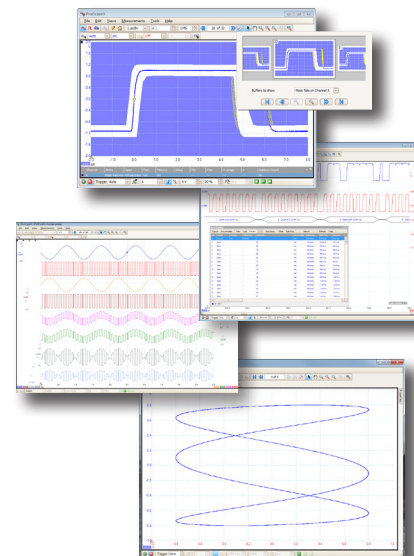

## MODEL SELECTOR

| MODEL               | BANDWIDTH | CHANNELS | SAMPLING | BUFFER MEMORY | EXT TRIG | AWG |
|---------------------|-----------|----------|----------|---------------|----------|-----|
| PicoScope 4424      | 20 MHz    | 4        | 80 MS/s  | 32 MS         | No       | No  |
| PicoScope 4224      | 20 MHz    | 2        | 80 MS/s  | 32 MS         | No       | No  |
| PicoScope 4224 IEPE | 20 MHz    | 2        | 80 MS/s  | 32 MS         | No       | No  |

## SPECIFICATIONS

| MODEL                                 | PicoScope 4424  | PicoScope 4224 | PicoScope 4224 IEPE                   |                      |
|---------------------------------------|---|----------------|---------------------------------------|----------------------|
|                                       |   |                | Passive Probe Mode                    | IEPE Interface Mode  |
| <b>INPUTS</b>                         |   |                |                                       |                      |
| Number of channels                    | 4 BNC inputs  | 2 BNC inputs   | 2 BNC inputs                          |                      |
| Analog bandwidth                      | DC to 20 MHz  |                | DC to 20 MHz                          | 1.6 Hz to 20 MHz     |
| Rise time<br>(10% to 90%, calculated) | 17.5 ns (35 ns on $\pm 50$ mV range)  |                |                                       |                      |
| Voltage ranges                        | $\pm 50$ mV to $\pm 100$ V in 11 ranges   |                | $\pm 50$ mV to $\pm 20$ V in 9 ranges |                      |
| Sensitivity                           | 10 mV/div to 20 V/div   |                | 10 mV/div to 4 V/div                  |                      |
| Graphing frequency measurement        | 20 Hz, 200 Hz, 2 kHz, and 20 kHz ranges   |                |                                       |                      |
| Vertical resolution                   | 12 bits (up to 16 bits with resolution enhancement)   |                |                                       |                      |
| Input coupling                        | AC or DC, software-controlled   |                |                                       |                      |
| Input impedance                       | 1 M $\Omega$    22 pF   |                | 1 M $\Omega$    22 pF                 | 1 M $\Omega$    1 nF |
| Overvoltage protection                | $\pm 200$ V   |                | $\pm 100$ V                           |                      |
| <b>SAMPLING</b>                       |   |                |                                       |                      |
| Timebases                             | 100 ns/div to 5000 s/div  |                |                                       |                      |
| Maximum sampling rate<br>(real time)  | 1/2 channels: 80 MS/s*<br>3/4 channels: 20 MS/s   | 80 MS/s        | 80 MS/s                               |                      |
| Buffer size                           | 32 MS shared between active channels  |                |                                       |                      |
| <b>TRIGGERING</b>                     |   |                |                                       |                      |
| Sources                               | Any input channel   |                |                                       |                      |
| Modes                                 | None, single, repeat, auto, rapid   |                |                                       |                      |
| Trigger types                         | Rising edge, falling edge, edge with hysteresis, pulse width, runt pulse, dropout, windowed |                |                                       |                      |
| <b>PERFORMANCE</b>                    |   |                |                                       |                      |
| Timebase accuracy                     | 50 ppm  |                |                                       |                      |
| DC accuracy                           | 1% of full scale  |                |                                       |                      |
| Trigger resolution                    | 1 LSB   |                |                                       |                      |
| Trigger re-arm time                   | 2.5 $\mu$ s (fastest timebase)  |                |                                       |                      |
| <b>ENVIRONMENT</b>                    |   |                |                                       |                      |
| Temperature range                     | Operating: 0 °C to 45 °C<br>For stated accuracy: 20 °C to 30 °C<br>Storage: -20 °C to 60 °C |                |                                       |                      |
| Humidity range                        | Operating: 5% to 80% RH, non-condensing<br>Storage: 5% to 95% RH, non-condensing            |                |                                       |                      |
| PC connection                         | USB 2.0. Compatible with USB 1.1 and USB 3.0.   |                |                                       |                      |
| PC operating system                   | Windows 7, Windows 8, Windows 10<br>32-bit and 64-bit versions                              |                |                                       |                      |
| Power supply                          | Powered by USB port   |                |                                       |                      |
| Dimensions                            | 200 mm x 140 mm x 38 mm including connectors  |                |                                       |                      |
| Weight                                | < 500 g   |                |                                       |                      |
| Compliance                            | EU EMC and LVD Standards<br>RoHS and WEEE, FCC Rules Part 15 Class A                        |                |                                       |                      |



## What do I get?

The PicoScope 4000 Series oscilloscope are available individually, or in kits containing the following items.

- PicoScope 4000 Series PC oscilloscope
- Passive x1/x10 60 MHz probes (2 or 4)
- Quick start guide
- USB 2.0 cable
- PicoScope software CD
- Tough, padded carrying case



## Also available in the PicoScope 4000 Series

### PicoScope 4262

- 16-bit resolution
- Low noise and distortion
- Arbitrary waveform generator
- 16 MS buffer
- 10 MS/s sampling rate
- 5 MHz bandwidth



### PicoScope 4824

- 8 input channels
- 256 MS buffer
- SuperSpeed USB 3.0 interface
- Arbitrary waveform generator
- 12-bit resolution
- 80 MS/s sampling rate



**PicoScope 2000 Series**  
Ultra-compact and handheld



**PicoScope 3000 Series**  
General-purpose 2 and 4 channel



**PicoScope 5000 Series**  
Flexible resolution 8 to 16 bits



**PicoScope 6000 Series**  
High performance Up to 1 GHz



**PicoScope 9000 Series**  
20 GHz sampling with TDR/TDT



For more information on any of these products, visit [www.picotech.com](http://www.picotech.com).

## Ordering information

| ORDER CODE | PART DESCRIPTION                               | USD* | EUR* | GBP* |
|------------|--|------|------|------|
| PP493      | PicoScope 4424 oscilloscope                    | 1315 | 1115 | 909  |
| PP479      | PicoScope 4424 oscilloscope kit, with 4 probes | 1365 | 1165 | 949  |
| PP492      | PicoScope 4224 oscilloscope                    | 819  | 699  | 569  |
| PP478      | PicoScope 4224 oscilloscope kit, with 2 probes | 859  | 729  | 599  |
| PP695      | PicoScope 4224 IEPE oscilloscope               | 989  | 839  | 679  |

\*Prices are correct at the time of publication. Sales taxes not included. Please contact Pico Technology for the latest prices before ordering.

**UK headquarters:**  
Pico Technology  
James House  
Colmworth Business Park  
St. Neots  
Cambridgeshire  
PE19 8YP  
United Kingdom  
☎ +44 (0) 1480 396 395  
☎ +44 (0) 1480 396 296  
✉ [sales@picotech.com](mailto:sales@picotech.com)

**USA headquarters:**  
Pico Technology  
320 N Glenwood Blvd  
Tyler  
Texas 75702  
United States  
☎ +1 800 591 2796  
☎ +1 620 272 0981  
✉ [sales@picotech.com](mailto:sales@picotech.com)

Errors and omissions excepted. Pico Technology and PicoScope are internationally registered trade marks of Pico Technology Ltd.

MM002.en-13. Copyright © 2011–2016 Pico Technology Ltd. All rights reserved.