

## Polarization Insensitive Isolator


<b>Features</b>	
Wide Operating Wavelength High isolation & Low insertion loss & Low PDL High stability and reliability	
<b>Application</b>	
EDFA & Testing instruments Transmitters WDM & DWDM System	

### Specifications

Parameter	Type	Single Grade		Dual Grade	
		P	A	P	A
Operating wavelength (nm)		1310, 1480, 1550, 1585, 1590			
Bandwidth		±15		±30	
Peak isolation (dB)		42	40	58	56
Isolation (at 23°C all sop) (dB)		≥28	≥26	≥46	≥45
Typ. Insertion Loss		0.35	0.40	0.40	0.50
Insertion Loss (at -5 ~ +70 °C all sop)		≤0.55	≤0.70	≤0.60	≤0.80
PDL at 23°C (dB)		≤0.05	≤0.1	≤0.1	≤0.15
PMD (ps)		≤0.2	≤0.25	≤0.05	≤0.07
Return loss (dB)		≥60/55	≥60/55	≥60/55	≥60/55
Power handling (mW)		≤300			
Fiber Type		SMF-28e			
Operating temperature (°C)		-5 ~ +70			
Storage temperature (°C)		-40 ~ +80			
Dimensions (mm)		φ5.5×L35			

\*Above specifications are for devices without the connectors.

### Package Dimensions

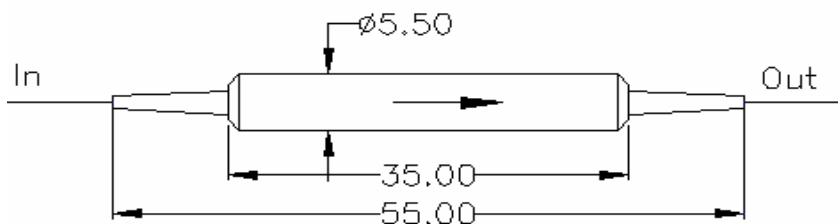

### Ordering Information

IS	Type	Grade	Wavelength	Pigtail Type	Fiber Type	Length	Connector	Package size
	S= Single stage D = Dual Stage	P A	1310 1550 1	250=250um bare fiber 900=900um loose tube	1=SMF-28e	1= 1m	NE=None FA=FC/APC FC=FC/UPC SA=SC/APC SC=SC/UPC LC=LC/UPC LA=LC/APC XX=Other	5.5x35