

镜头参数 (Parameter of Lens)


型号 (Model) :

D14-0622IR (5MP)



| | | | | | | | |
|-------------------------------|-----------------------|-------|------|---------------|------|------|------|
| 分辨率 (Resolution) | 5MegaPixel | | | | | | |
| 像面尺寸 (Image format) | 1/2.5" | | | | | | |
| 焦距 (Focal length) | 06~22mm | | | | | | |
| 通光孔径 (Aperture) | F2.2 | | | | | | |
| 接口 (Mount) | D14 | | | | | | |
| 视场角 (Field Angle) D×H×V(°) | ° | 1/2.5 | | 1/3 | | 1/4 | |
| | | 短焦 | 长焦 | 短焦 | 长焦 | 短焦 | 长焦 |
| | D | 58 | 20.4 | 46.5 | 18 | 34.5 | 12.6 |
| | H | 46.4 | 16.3 | 37.2 | 14.4 | 27.6 | 10.1 |
| V | 34.8 | 12.2 | 27.9 | 11.4 | 22.5 | 7.6 | |
| 畸变 (Optical Distortion) | -0.61~-15.6% (1/2.5") | | | | | | |
| 最近物距 (M. O. D.) | 0.3m | | | | | | |
| 外形尺寸 (Dimension) | Φ28×45.3mm | | | | | | |
| 重量 (Weight) | 68.7±5g | | | | | | |
| 法兰后焦距 (Flange BFL) | 13.5mm | | | | | | |
| 光学后焦距 (BFL) | 6.4mm | | | | | | |
| 机械后焦距 (MBF) | 6.2mm | | | | | | |
| 日夜共焦 (IR Correction) | Yes | | | | | | |
| 操作方法 (Operation) | 光圈 (Iris) | | | 固定光圈 (Fixed) | | | |
| | 聚焦 (Focus) | | | 手动聚焦 (Manual) | | | |
| | 变焦 (Zoom) | | | 手动变焦 (Manual) | | | |
| 工作温度 (Operating temperature) | -20℃~+60℃ | | | | | | |

尺寸 (Size)

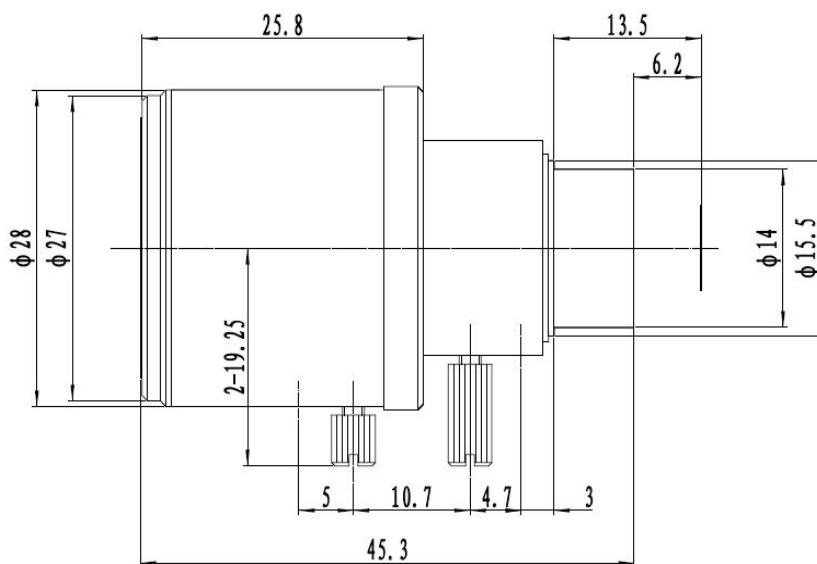

尺寸公差 Size tolerance (mm) :

0-10±0.05

10-30±0.10

30-120±0.20

角度公差 Angle tolerance

±2°