


## RGB Fiber Patchcord

<b>Features</b>	
Low Insertion Loss High Return Loss & High Repeatability	
<b>Application</b>	
LAN, Data network	
CATV Network Telecommunication	

### Specifications:

Parameter	Value	
Connector Type	FC, SC, LC etc	
Operating Wavelength (nm)	488, 532, 635	
Fiber Type	Nufern 460 HP fiber for 488 nm Nufern 460 HP Fiber for 532nm Nufern 630 HP fiber for 635 nm	
Insertion loss (dB)	≤1.5	
Return loss (dB)	UPC	≥50
	APC	≥60
Repeatability (dB)	≤0.1	
Changeability (dB)	≤0.2	
Operating temperature (°C)	-40 ~ + 85	

### Package

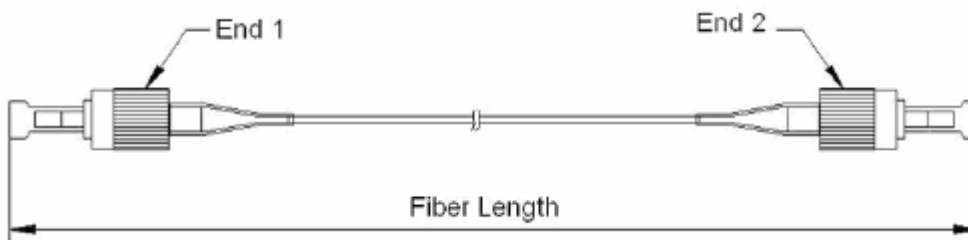

### Ordering Information

JP	Connector (End 1)	Connector (End2)	Wavelength	Pigtail Type	Fiber Type	Length
	NE=None FA=FC/APC FC=FC/UPC SA=SC/APC SC=SC/UPC LC=LC/UPC LA=LC/APC	NE=None FA=FC/APC FC=FC/UPC SA=SC/APC SC=SC/UPC LC=LC/UPC LA=LC/APC	488 532 635	250=250um bare fiber 900=900um loose tube 3000=3mm loose tube	460HP 630HP	1=1m X=Specify