


Polarization Maintaining Fiber Patchcord

Features	
Low Insertion Loss High Extinction Ratio High stability and reliability	
Application	
Fiber Laser Fiber Amplifier Testing Instrument Optic lab use	

Specifications

Parameter	Value		
Connector Type	FC/UPC, SC/UPC, LC/UPC, FC/APC, SC/APC, LC/APC		
Wavelength (nm)	1310, 1480, 1550	980, 1064,	850
Insertion Loss (dB)	≤0.3	≤0.5	≤0.7
Return loss (dB)	UPC Type	≥50	
	APC type	≥60	
Extinction Ratio (dB)	≥23	≥23	≥23
Fiber Type	PM1310, PM1550	PM980	PM850
Key Orientation	Slow Axis		
Axis Alignment (deg)	±3		
Operating temperature (°C)	-5~+70		
Storage temperature (°C)	-40 ~ +80		

Package Dimensions

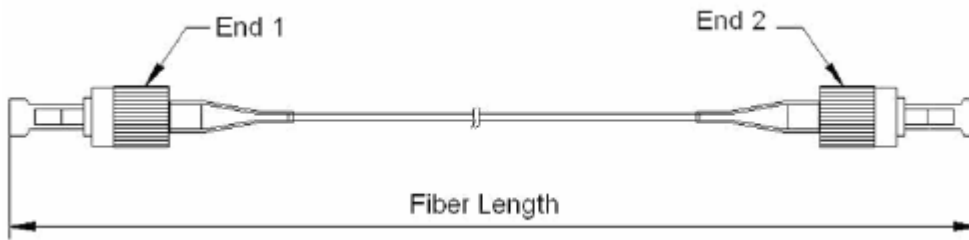

Ordering Information

PMJP	Connector End1	Connector End 2	Wavelength	Pigtail Type	Fiber Type	Fiber Length
	NE=None FA=FC/APC FC=FC/UPC SA=SC/APC SC=SC/UPC LC=LC/UPC LA=LC/APC X=Other	NE=None FA=FC/APC FC=FC/UPC SA=SC/APC SC=SC/UPC LC=LC/UPC LA=LC/APC X=Other	850 980 1064 1310 1550	250=250um bare fiber 900=900um loose tube 2000=2mm loose tube 3000=3mm loose tube	PM850 PM980 PM1310 PM1550	1=1m 2=2m X=Other