

MPL-W-355/25~80μJ/400~2000mW



LD PUMPED ALL-SOLID-STATE  
UV LASER




All solid state 355nm UV laser is made features of ultra compact, long lifetime, and easy operating, which is widely used in UV curing, micro-electronics, CD carving, laser medical treatment, scientific experiment, etc.



SPECIFICATIONS

Wavelength (nm)		355 ± 1
Operating mode		Passively Q-switched
Average power (mW)		400~2000
Single pulse energy (μJ)		25~80
Pulse duration (ns)		~5
Peak power (kW)		5~16
Rep. rate (kHz)	FIXED	Setting up one fixed rep. rate internal between 1kHz-4kHz with stable pulse energy, pulse duration and pulse period.
	EXT TRIG	1kHz-4kHz by external trigger with stable pulse energy, pulse duration and pulse period.
	QCW	QCW state with one rep. rate between 15k-25kHz.
Power stability (over 4 hours)		<5%, <10%
Transverse mode		Near TEM <sub>00</sub>
Beam divergence, full angle (mrad)		<2.0
Beam diameter at the aperture (1/e <sup>2</sup> ,mm)		~4.0
Warm-up time (minutes)		<10
Beam height from base plate (mm)		93.5
Operating temperature (°C)		10~35
Power supply (90-264VAC)		PSU-W-LED PSU-W-FDA
Expected lifetime (hours)		8000
Warranty period		1 year
Remarks		Please Note: because of the Walk-off effect of Nonlinear crystals, the beam quality of UV laser is not so good as that of 1064/532nm laser.

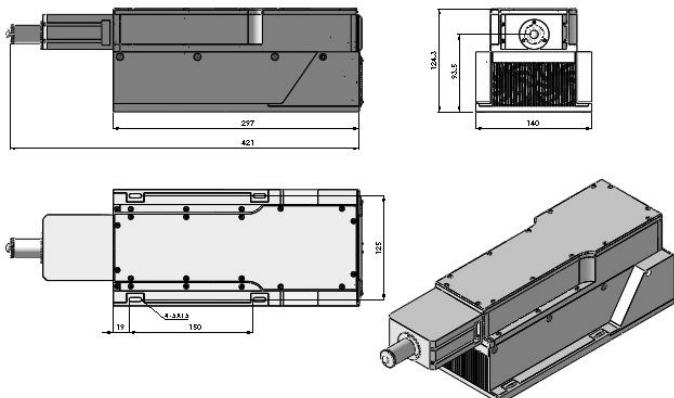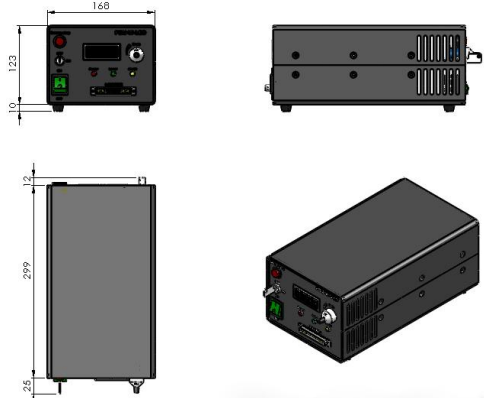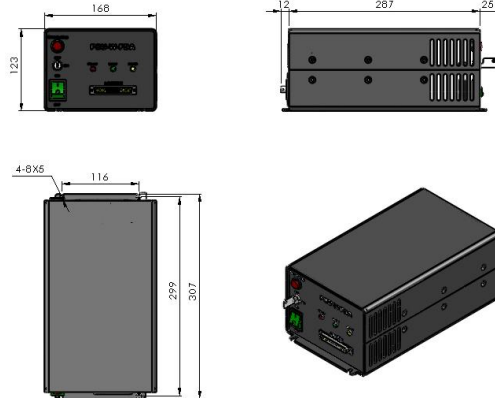

MxL-W-355	PSU-W-LED	PSU-W-FDA
 <p>421(L)×140(W)×124.3(H) mm<sup>3</sup>, 6.0 kg</p>	 <p>336 (L) ×168(W) ×133(H) mm<sup>3</sup>, 4.6 kg</p>	 <p>307 (L) ×168(W) ×123(H) mm<sup>3</sup>, 4.5 kg</p>