


SAM™ Data Sheet SAM-1150-4-500fs-x, $\lambda = 1150$ nm

Laser wavelength	$\lambda = 1150$ nm
High reflection band	$\lambda = 1110 \dots 1200$ nm
Absorptance	$A_0 = 4$ %
Saturation fluence	$\Phi_{\text{sat}} = 70$ $\mu\text{J}/\text{cm}^2$
Relaxation time constant	$\tau \sim 500$ fs
Modulation depth	$\Delta R = 2.5$ %
Damage threshold	$\Phi = 1$ mJ/cm^2
Chip area	4.0 mm x 4.0 mm; other dimensions on request
Chip thickness	450 μm
Protection	the SAM is protected with a dielectric front layer


Mounting option **x** denotes the type of mounting as follows:

x = 0	unmounted
x = 12.7 g	glued on a gold plated Cu-cylinder with 12.7 mm \varnothing
x = 25.4 g	glued on a gold plated Cu-cylinder with 25.4 mm \varnothing
x = 12.7 s	soldered on a gold plated Cu-cylinder with 12.7 mm \varnothing
x = 25.4 s	soldered on a gold plated Cu-cylinder with 25.4 mm \varnothing

Low intensity spectral reflectance

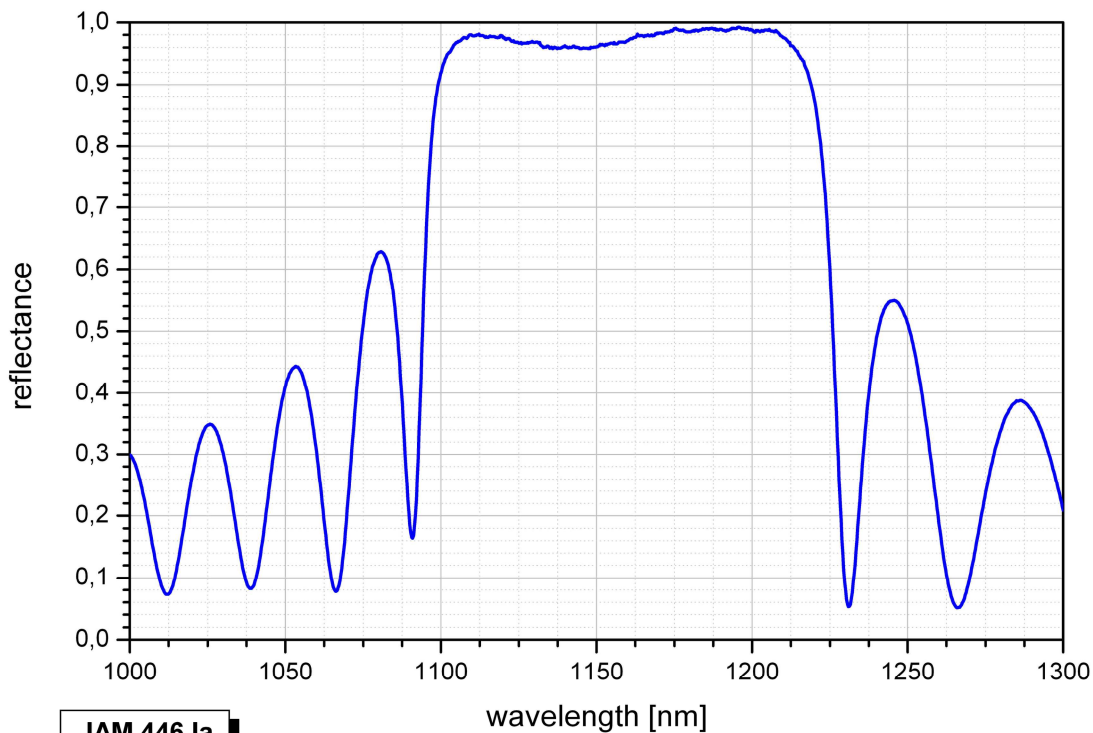

JAM 446 la

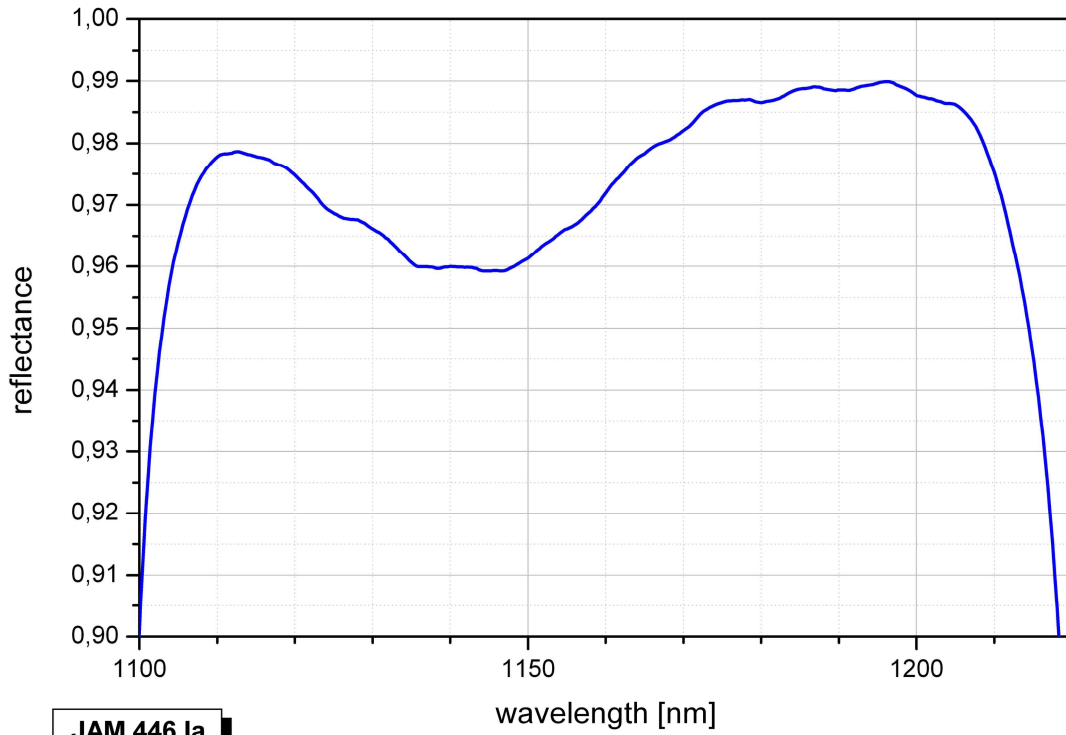

JAM 446 la