

MPL-N-532/50~125µJ/150~1500mW



LD PUMPED ALL-SOLID-STATE Q-SWITCHED LASER




All solid state Q-switched laser at 532nm has the features of high peak power, high repetition rate, and short pulse duration, which is widely used in industry, such as marking on highly reflective metals, semiconductors, carbide, rubbers, ceramics and composites.



SPECIFICATIONS

Wavelength (nm)		532±1
Operating mode		Q-switched pulsed laser
Average power (mW)		150~1500
Single pulse energy (µJ)		50~125
Pulse duration (ns)		~5
Peak power (kW)		10~25
Rep. rate (kHz)	FIXED	Setting up one fixed rep. rate internal between 1kHz-10kHz with stable pulse energy, pulse duration and pulse period.
	EXT TRIG	1kHz-10kHz by external trigger with stable pulse energy, pulse duration and pulse period.
	QCW	QCW state with one rep. rate between 1kHz-15kHz.
Power stability (over 4 hours)		<3%, <5%
Transverse mode		Near TEM ₀₀
M ² factor		<1.5
Beam divergence, full angle (mrad)		<2
Beam diameter at the aperture (1/e ² .mm)		~0.8
Warm-up time (minutes)		<10
Beam height from base plate (mm)		68.5
Operating temperature (°C)		10~35
Power supply (90-264VAC)		PSU-H-LED PSU-H-FDA
TTL / Analog modulation		TTL or Analog with 1Hz-1KHz 1KHz-10KHz, 10KHz-30KHz optional
Expected lifetime (hours)		10000
Warranty period		1 year

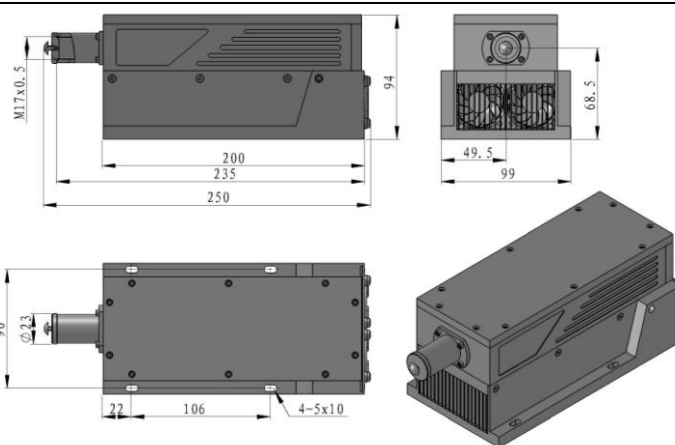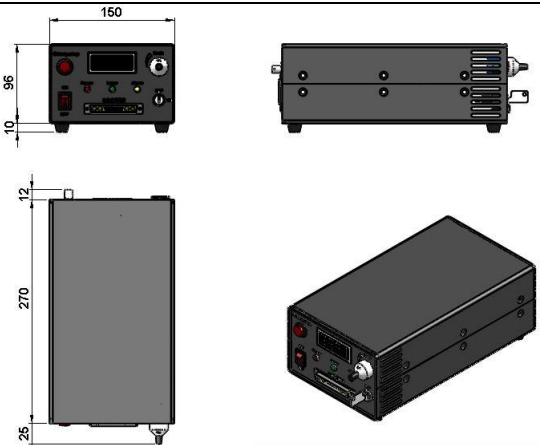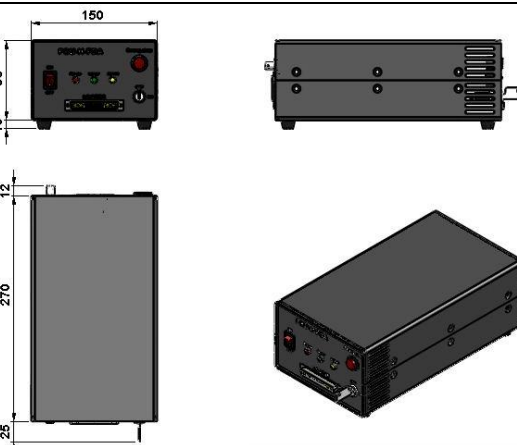

MPL-N-532	PSU-H-LED	PSU-H-FDA
 <p>250(L)×99(W)×94(H) mm³, 2.6 kg</p>	 <p>307 (L) ×150(W) ×106 (H) mm³, 2.9 kg</p>	 <p>307 (L) ×150(W) ×106 (H) mm³, 2.9 kg</p>

Website: <http://www.cnilaser.com> E-mail: sales@cnilaser.com Tel: +86-431-85603799 Fax: +86-431-87020258