

OEM-N-532/2000~5000mW



LD PUMPED ALL-SOLID-STATE GREEN LASER MODULE CORE

All solid state 532nm green laser module core is made features of ultra compact, long lifetime and easy operating. It's easy to be integrated into customer's equipment.

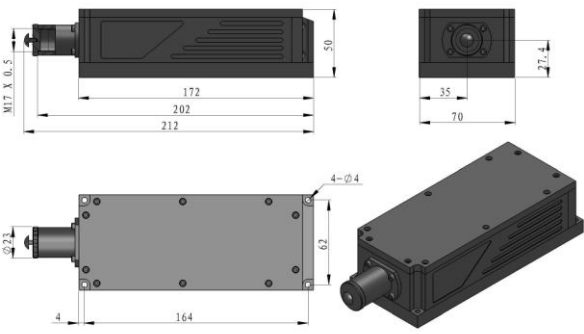
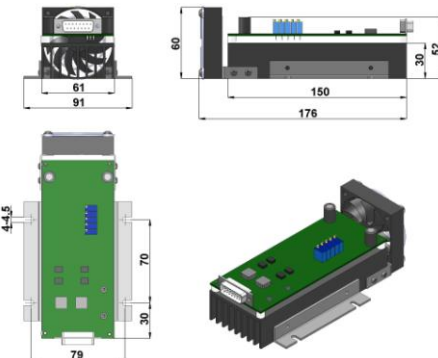
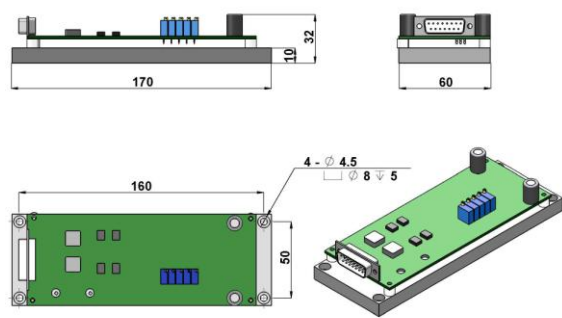
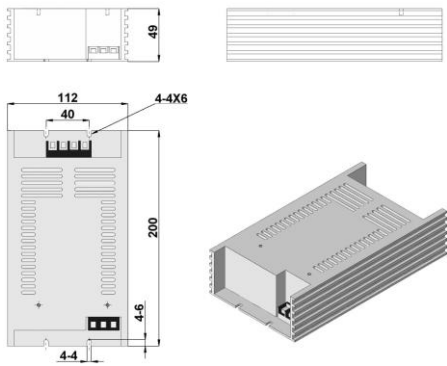


SPECIFICATIONS

Wavelength (nm)	532±1
Operating mode	CW
Output power (mW)	>2000, 2500, 3000, ..., 5000
Power stability (rms, over 4 hours) at 25℃	<1%, <3%, <5%, <10%
Transverse mode	Near TEM <sub>00</sub>
M <sup>2</sup> factor	<3.0
Beam divergence, full angle (mrad)	<1.0
Beam diameter at the aperture (1/e <sup>2</sup> ,mm)	~3.0
Polarization ratio	>100:1
Warm-up time (minutes)	<10
Beam height from base plate (mm)	27.4
Operating temperature (℃)	22.5+/-2.5
Driver (two channels 6VDC 12A & 12VDC 8A)	PSU-OEM-N (key switch and emergency stop are available on request)
TTL / Analog modulation	TTL or Analog with 1Hz-1KHz 1KHz-10KHz, 10KHz-30KHz optional
Expected lifetime (hours)	10000
Warranty period	1 year



Note: The laser needs to be used on a heat sink with good heat dissipation.

OEM-N-532	PSU-OEM-N		Accessory (Power supply 100-240VAC)
	A heat dissipation	No heat dissipation	
 <p>212 (L) ×70(W) ×50 (H) mm<sup>3</sup>, 1.4kg</p>	 <p>176 (L) ×91(W) ×60 (H) mm<sup>3</sup>, 0.5kg</p>	 <p>170 (L) ×60(W) ×32 (H) mm<sup>3</sup>, 0.4kg</p>	 <p>200 (L) ×112(W) ×49 (H) mm<sup>3</sup>, 1.0kg</p>