

HPL-660-QM/50~100W

SPECIFICATIONS





**WATER COOLING LD PUMPED  
ALL-SOLID-STATE Q-SWITCHED  
RED LASER at 660 nm**

All solid state Q-switched red laser at 660nm has the features of high peak power, high repetition rate, and short pulse duration, which is widely used in laser measurement, laser display, scientific research, military, and so on.



Wavelength (nm)	660±1
Operating mode	Acousto-Optics Q-switched
Average power (W)	50~100
Pulse duration (ns)	~150 @10kHz&100W
Rep. rate (kHz)	10~20 (It is possible to customize other repetition rates )
Single pulse energy (mJ)	10 @10kHz&100W
Peak power (kW)	66 @10kHz&100W
Ave power stability (over 4 hours)	<3%, 5%
Beam divergence, full angle (mrad)	<3.5
Beam diameter at the aperture (mm)	≥15
Beam height from base plate (mm)	55
Warm-up time (minutes)	<10
Cooled method	Water Cooled
Operating temperature (°C)	15~35
Power supply (220/110VAC)	PSU-HPL (2U×4)
Expected lifetime (hours)	10000
Warranty period	1 year

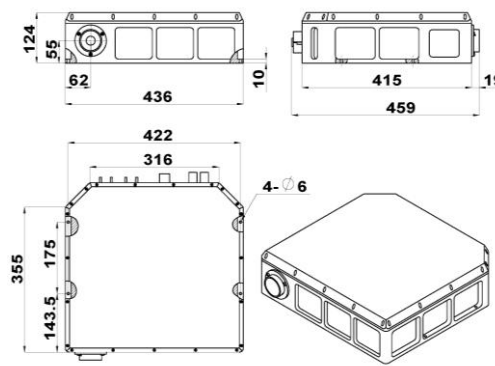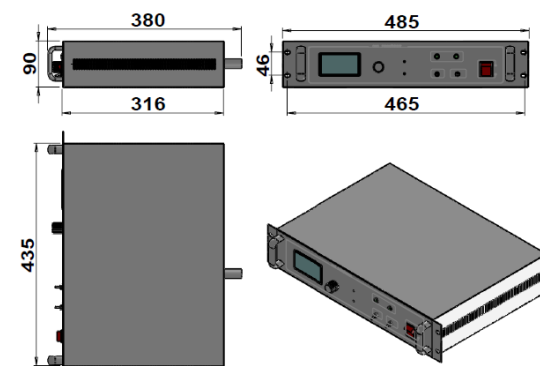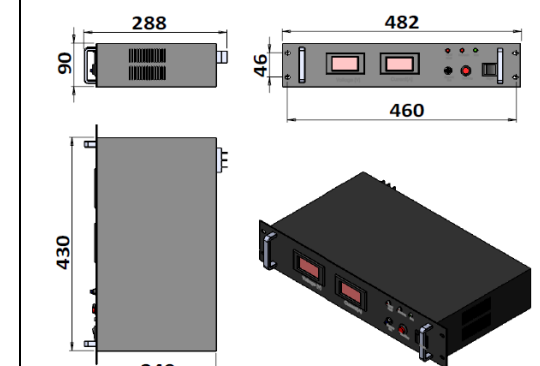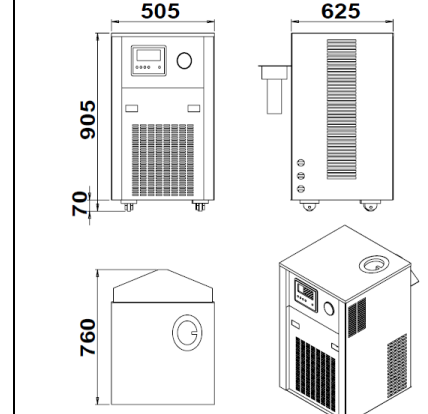

HPL-660-QM	PSU-HPL-Q (2U×2)	PSU-HPL-CW (2U×2)	Water Chiller
 <p>459 (L)×436(W)×124(H) mm<sup>3</sup>, 23kg</p>	 <p>380 (L) ×485(W) ×90(H) mm<sup>3</sup>, 7.5kg</p>	 <p>288(L) ×482(W) ×90(H) mm<sup>3</sup>, 5.5kg</p>	 <p>505 (L) ×625(W) ×975(H) mm<sup>3</sup>, 95kg</p>