

MSL-III-1342/1~200mW



**SINGLE LONGITUDINAL MODE
INFRARED LASER AT 1342nm**

All solid state single longitudinal mode infrared laser at 1342nm is made features of ultra compact, long lifetime, low cost and easy operating, which is used in DNA sequencing, flow cytometry, cell sorting, optical instrument, spectrum analysis, interference, measurement, holography, physics experiment, etc.




SPECIFICATIONS

Wavelength (nm)	1342±1
Operating mode	CW
Output power (mW)	>1, 5, 10, 20, ... , 200
Power stability (rms, over 4 hours)	<1%, <3%, <5%
Transverse mode	TEM ₀₀
Longitudinal mode	Single
Spectral linewidth (nm)	<0.00001
Coherent length (m)	>50
Noise of amplitude (rms, 1Hz~20MHz)	<1%, typical<0.5%
M ² factor	<2.0
Beam diameter at the aperture (1/e ² , mm)	<2.0
Beam divergence, full angle (mrad)	<1.5
Polarization ratio	>100:1, Horizontal±5 degree (Vertical Optional)
Warm-up time (minutes)	<10
Pointing stability after warm-up (mrad)	<0.05
Beam height from base plate (mm)	24.8
Operating temperature (°C)	15~35
Power supply (90-264VAC)	PSU-III-FDA
Expected lifetime (hours)	10000
Warranty	1 year




MXL-III-1342

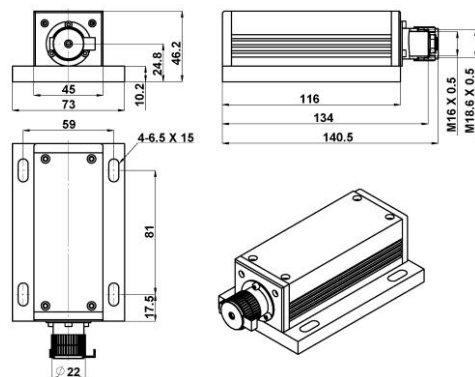

140.5 (L) × 73 (W) × 46.2 (H) mm³, 0.6kg

PSU-III-FDA

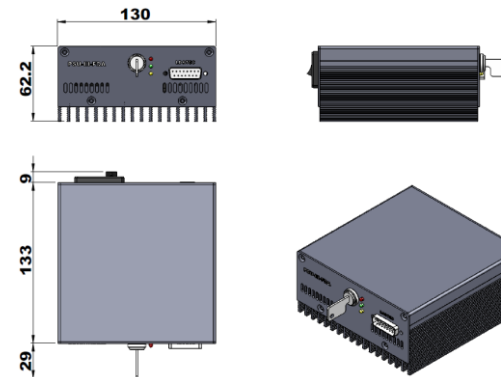

133 (L) × 130 (W) × 62.2 (H) mm³, 1.2kg