


635nm 500mw High Power Laser Diode| C-mount Package


635nm LD 0.5W Power| C mount Pacakge| High Power

WSLD-635-500m-C


635nm Laser Diode 500mw		Wavespectrum Laser, Inc	
PARAMETER	SYMBOL	VALUE	UNIT
Reverse Voltage	V_r	2.0	V
Operating Temperature	T_{op}	+10~+25	°C
Storage Temperature	T_{stg}	-40 ~ +85	°C
Lead soldering temperature (10 sec.)	T_{is}	280	°C
Features: <ul style="list-style-type: none"> 635nm High power ,CW, Multi-mode High Quality C-mount package 			
Applications: <ul style="list-style-type: none"> Medical laser treatment Laser indicator Laser detector 			
Specifications		WSLD-635-500m-C	
		Min	Type
Center Wavelength@25°C		630nm	635nm
Spectral Width (FWHM)			1nm
Output Power			500mW
Emitter Area			100x1μm
Beam Divergence (FWHM)			40°± x 10°//
Temperature Coefficient of Wavelength			0.25nm / °C
Slope Efficiency		0.80W/A	0.95W/A
Threshold Current (Typ.)			0.75A
Operating Current (Typ.)			1.20A
Operating Voltage			2.2V
Package Style			C-mount



Spectrum

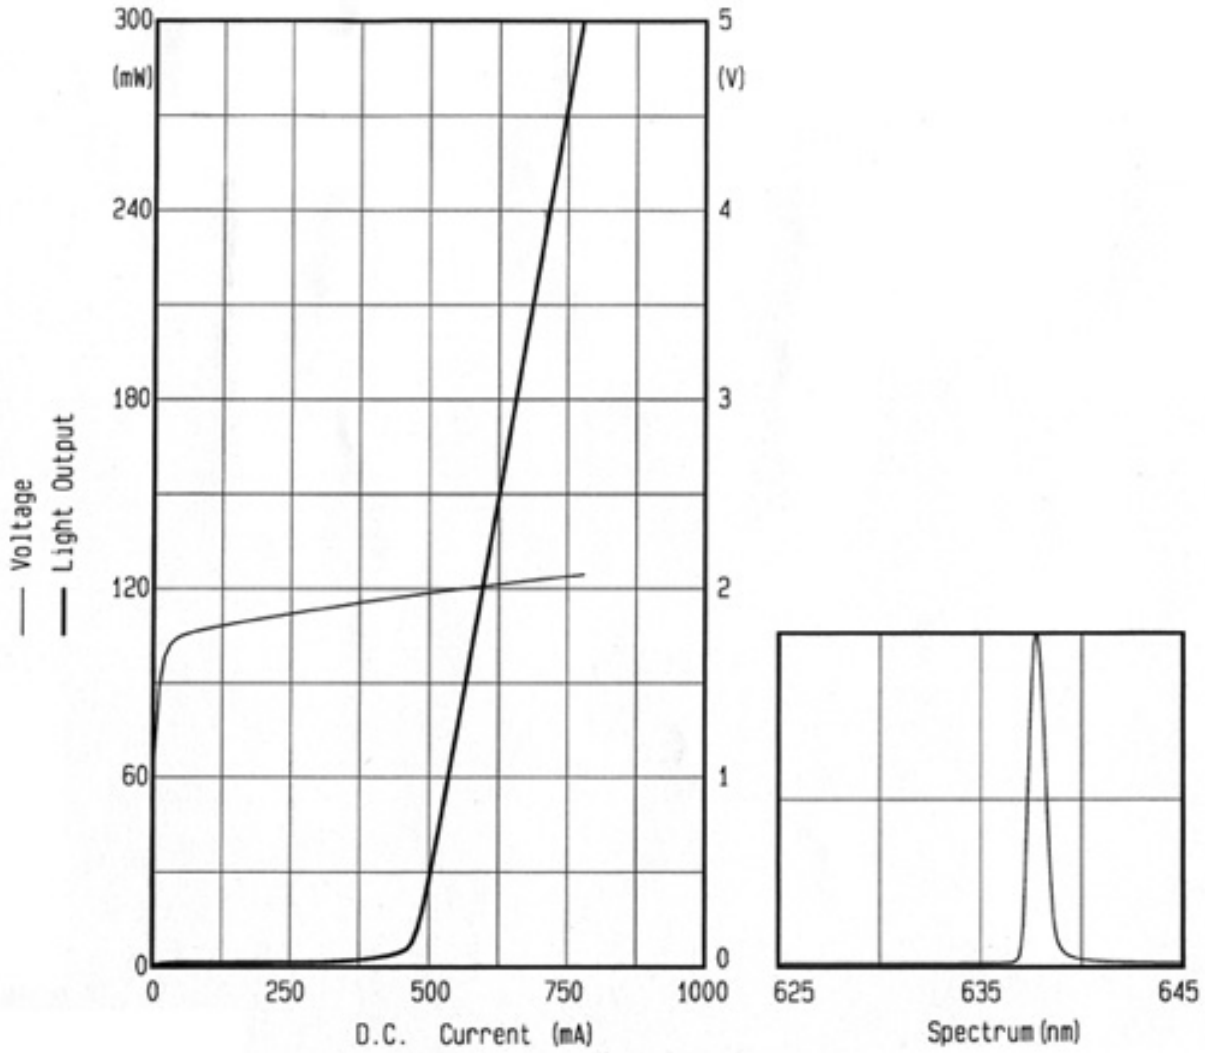

C-mount Package View

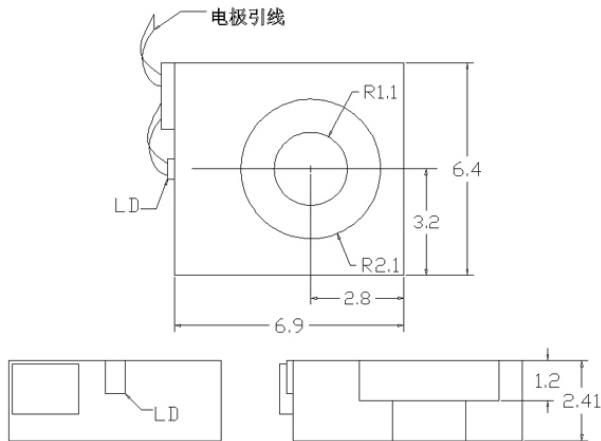

Electrically shorten LD module and store in non-extreme conditions.

Suggest using the constant current power supply.

