



FL-1030-S/1uW~200mW



ALL FIBER PULSED LASER

High frequency all fiber pulsed laser at 1030nm is made features of high peak power stability, good beam profile, ultra compact, long lifetime, low cost and easy operating, which is widely used in laser radar, life science, microelectronics, scientific research, optical simulation, etc.



SPECIFICATIONS

Wavelength (nm)	1030±1	
Operating mode	Pulsed	
Peak power (mW)	1uW~1mW (fixed)	1mW~200mW (fixed)
Power stability (rms, over 4 hours)	<1%, <3%	
Pulse width(ns)	5ns-100ns (adjustable)	
M ² factor	<1.2	
Repetition frequency(Hz)	1Hz-100KHz, 1Hz-10MHz (adjustable)	
Polarization ratio	Random/>15dB	
Warm-up time (minutes)	<5	
Delivery cable length(m)	variable	
Operating temperature (°C)	15~35	
Power supply	5V DC	
Expected lifetime (hours)	10000	
Warranty	1 year	

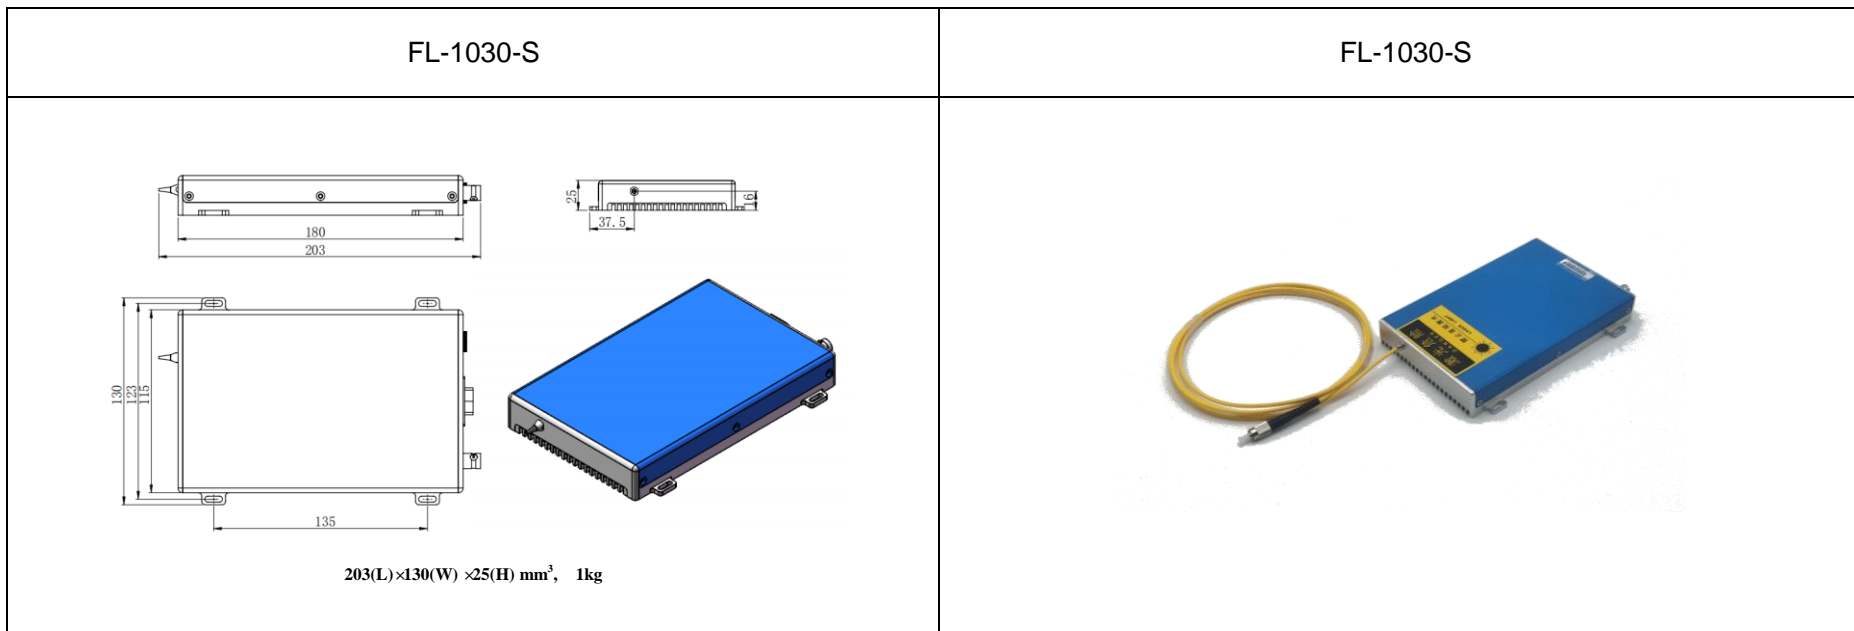

Website: <http://www.cnilaser.com> E-mail: sales@cnilaser.com Tel: +86-431-85603799 Fax: +86-431-87020258

Kokyo 株式会社 光響
〒600-8411
京都市下京区烏丸通四條下ル水銀屋町637番地 第5長谷ビル2階
FAX : 075-320-1604 E-mail: info@symphotony.com