



**FL-1070-Pico/10~5000mW**


**PICOSECOND ALL FIBER PULSED LASER**

Picosecond all fiber pulsed laser at 1070nm is made features of high output power stability, good beam profile, ultra compact, long lifetime, cost-effectiveness and easy operating, which is widely used in laser radar, precision marking, precision drilling, life science, precision etching, microelectronics, scientific research, etc.




**SPECIFICATIONS**

Wavelength (nm)	1070±1		
Operating mode	Pulsed		
Output power (mW)	10~100	100~2000	2000~5000
Power stability (rms, over 4 hours)	<2%, <3%		
Pulse width (ps) <sup>(1)</sup>	One fixed value between 100~900ps		
M <sup>2</sup> factor	<1.2	<1.8	
Repetition frequency (MHz) <sup>(2)</sup>	One fixed value between 0.1-20MHz		
Polarization ratio	Random / > 15dB		
Warm-up time (minutes)	<15		
Delivery cable length (m)	variable		
Operating temperature (°C)	15~35		
Power supply	24V DC		
Expected lifetime (hours)	10000		
Warranty	1 year		
Options	(1) Pulse width 100~900ps variable (2) Repetition rate 0.1-20MHz variable RS 232 interface Higher output power can be customized		



**FL-1070-Pico**

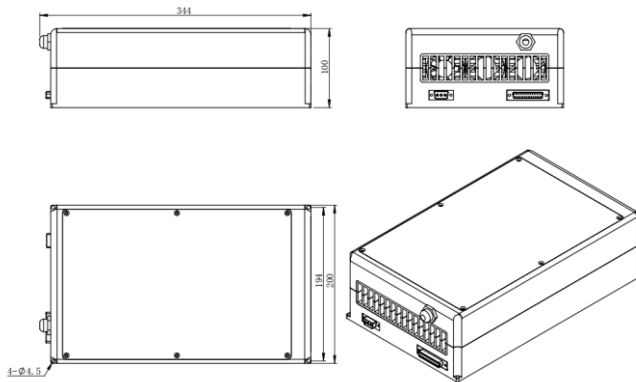

344(L)×200(W) ×100(H) mm<sup>3</sup> 6.5kg



Website: <http://www.cnilaser.com> E-mail: [sales@cnilaser.com](mailto:sales@cnilaser.com) Tel: +86-431-85603799 Fax: +86-431-87020258

**Kokyo** 株式会社 光響  
〒600-8411  
京都市下京区烏丸通四条下ル水銀屋町637番地 第5長谷ビル2階  
FAX : 075-320-1604 E-mail: [info@symphotony.com](mailto:info@symphotony.com)