



FL-1550-CW/1~10W


HIGH POWER ALL FIBER CW LASER

High Power all fiber CW laser at 1550nm is made features of ultra compact, long lifetime, low cost and easy operating, eyesafe wavelength, which is widely used in medical cosmetology, holography spectrum analysis, scientific experiment, etc.




SPECIFICATIONS

Wavelength (nm)	1550±10
Operating mode	CW or Modulated(≤50KHz)
Output power (W)	1-10
Power stability (rms, over 4 hours)	<2%, <3%
Delivery Fiber Length (m)	2-5
Output Fiber termination	Collimator
Beam Diameter (mm)	4±1
M ² factor	<1.5
Polarization state	Random / >15dB
Warm-up time (minutes)	<15
Operating temperature (°C)	15~35
Power supply	220V AC / 12V DC
Expected lifetime (hours)	10000
Warranty	1 year



FL-1550-CW-OEM(12V DC)

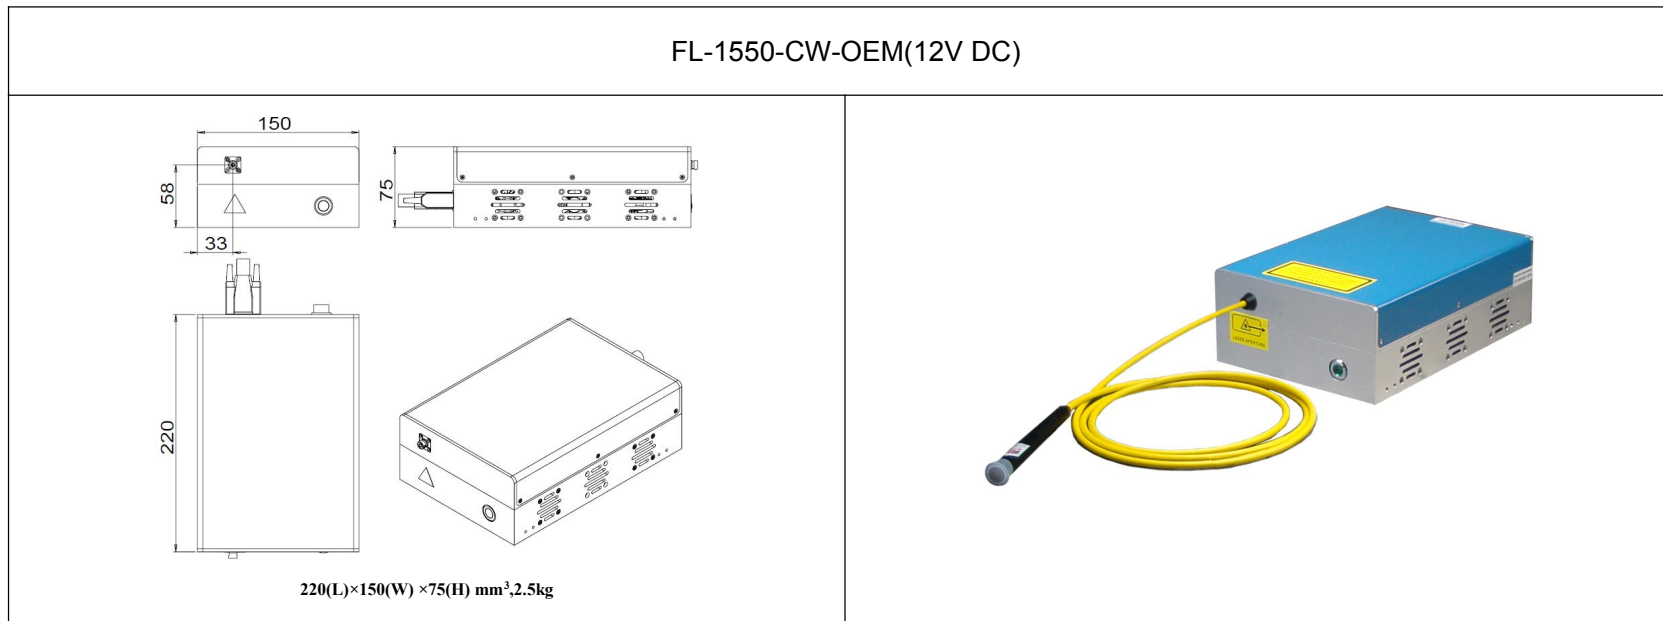

Website: <http://www.cnilaser.com> E-mail: sales@cnilaser.com Tel: +86-431-85603799 Fax: +86-431-87020258

Kokyo
株式会社 光響
〒600-8411
京都市下京区烏丸通四条下ル水銀屋町637番地 第5長谷ビル2階
FAX : 075-320-1604 E-mail: info@symphotony.com