

MDL-NS-520/1~100mW




**NANOSECOND PULSED
GREEN DIODE LASER
AT 520nm**

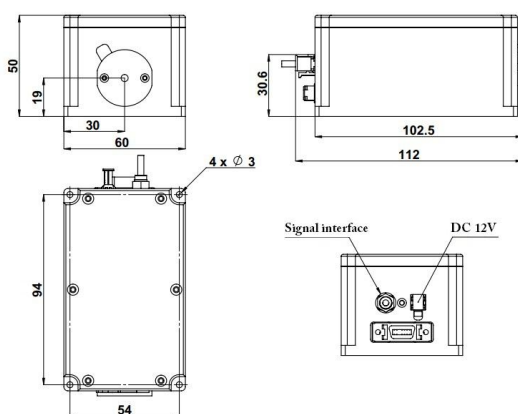
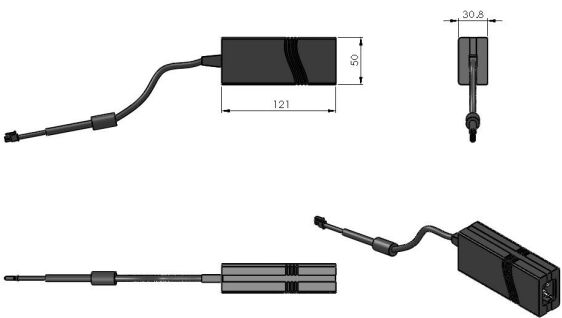
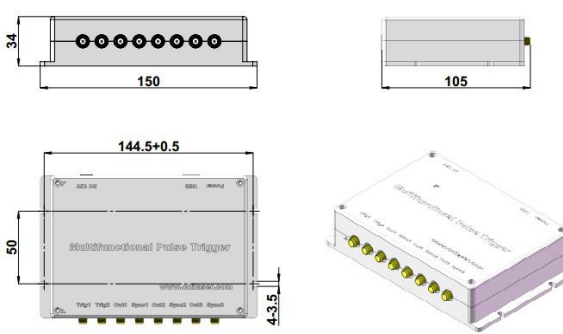
This series laser products with excellent material removal rate, are widely used in microelectronics, material processing, solar energy and medical equipment manufacturing, etc.



SPECIFICATIONS

Central wavelength (nm)	520±5	
Output power@3.3VDC (mW, CW)	>1, 10, 20, ...,50	>50, 60, ...,100
Power stability (rms, over 4 hours)	<1%, <2%, <3%	
Pulse width (FWHM)	>10ns, 20ns, ...,10ms	>15ns, 20ns, ...,10ms
Transverse mode	Near TEM ₀₀	
Noise of amplitude(rms, CW)	<1%	
M ² factor	<1.2	
Beam diameter at the aperture (1/e ² ,mm)	~1.2	
Beam divergence, full angle (mrad)	<1.0	
Polarization ratio	>50:1 (>100:1, optional) Horizontal±5 degree (Vertical Optional)	
User trigger frequency (Multifunctional Pulse Trigger optional)	1Hz-50MHz	1Hz-45MHz
Rise Time (ns)	<3	<10
Fall Time (ns)	<2	<4
Modulation Depth (extinction ratio)	>1000000:1	
Warm-up time (minutes)	<5	
Beam height from base plate (mm)	19	
Operating temperature (°C)	10~35	
Input voltage	+12VDC	
Expected lifetime (hours)	10000	
Warranty	1 year	



MDL-NS-520	Optional Power Supply	Multifunctional Pulse Trigger
 <p>112(L) × 60(W) × 50(H) mm³, 0.5kg</p>	 <p>121(L) × 50(W) × 30.8(H) mm³, 0.3kg</p>	 <p>150(L) × 105(W) × 34(H) mm³, 0.5kg</p>

Website: <http://www.cnilaser.com> E-mail: sales@cnilaser.com Tel: +86-431-85603799 Fax: +86-431-87020258