

MDL-NS-405/1~500mW




**NANOSECOND PULSED
VIOLET DIODE LASER
AT 405nm**

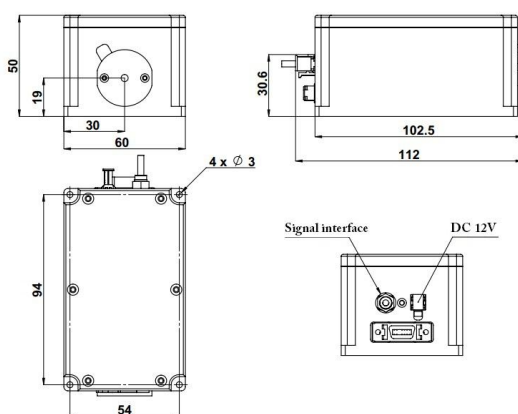
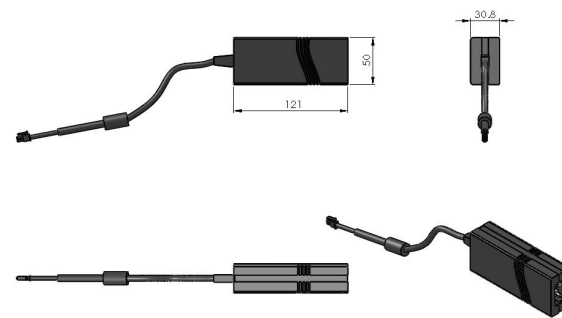
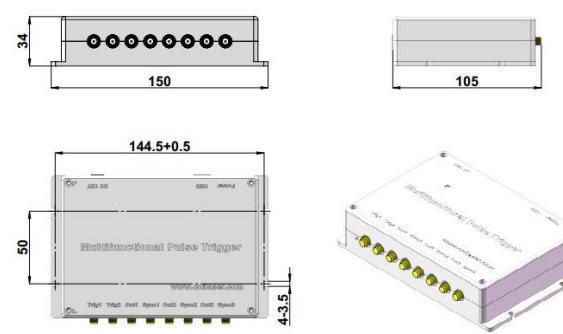
This series laser products with excellent material removal rate, are widely used in microelectronics, material processing, solar energy and medical equipment manufacturing, etc.



SPECIFICATIONS

Central wavelength (nm)	405±5	
Output power@3.3VDC (mW, CW)	>1, 10, 20, ...,200	>200, 300, ...,500
Power stability (rms, over 4 hours)	<1%, <2%, <3%	
Pulse width (FWHM)	>10ns, 20ns, ...,10ms	>12ns, 13ns, ...,10ms
Transverse mode	Near TEM ₀₀	
Noise of amplitude(rms, CW)	<1%	
M ² factor	<1.2	
Beam diameter at the aperture (1/e ² ,mm)	~1.2	
Beam divergence, full angle (mrad)	<1.0	
Polarization ratio	>50:1 (>100:1, optional) Horizontal±5 degree (Vertical Optional)	
User trigger frequency (Multifunctional Pulse Trigger optional)	1Hz-80MHz	1Hz-45MHz
	1Hz-25MHz by using CNI Multifunctional Pulse Trigger	
Rise Time (ns)	<3	<7
Fall Time (ns)	<3	<3
Modulation Depth (extinction ratio)	>1000000:1	
Warm-up time (minutes)	<5	
Beam height from base plate (mm)	19	
Operating temperature (°C)	10~35	
Input voltage	+12VDC	
Expected lifetime (hours)	10000	
Warranty	1 year	



<p style="text-align: center;">MDL-NS-405</p>  <p style="text-align: center;">112(L) × 60(W) × 50(H) mm³, 0.5kg</p>	<p style="text-align: center;">Optional Power Supply</p>  <p style="text-align: center;">121(L) × 50(W) × 30.8 (H) mm³, 0.3kg</p>	<p style="text-align: center;">Multifunctional Pulse Trigger</p>  <p style="text-align: center;">150(L) × 105(W) × 34(H) mm³, 0.5kg</p>
---	---	--

Website: <http://www.cnilaser.com> E-mail: sales@cnilaser.com Tel: +86-431-85603799 Fax: +86-431-87020258