**FS-F-1030A**/1-10W

# FEMTOSECOND PULSED LASER AT 1030nm




All Fiber Femtosecond pulsed laser at 1030nm is made features of short pulse duration, high repetition rate, high stability and good beam quality, which is used in optical microscope, photon imaging, physics experiment, etc.

**SPECIFICATIONS**

| | |
|---|---|
| Wavelength (nm) | 1030±10 |
| Operating mode | Pulsed |
| Average power (W)[1] | 1-10 |
| Single pulse energy (uJ) | 1-10 |
| Rep. rate (MHz) | 1 |
| Pulse duration (fs) | <300 |
| Peak power (MW) | 1-28 |
| Ave power stability (rms, 4 hours±3℃) | <2%, <1% |
| Warm-up time (minutes) | <10 |
| Transverse mode | $TEM_{00}$ |
| Beam quality($M^2$) | <1.3 |
| Beam divergence, full angle (mrad) | <1.0 |
| Beam diameter at the aperture ($1/e^2$,mm) | <2 |
| Polarization ratio | >100:1 Vertical |
| Beam height from base plate (mm) | 118 |
| Cooled method | Water cooled |
| Operating temperature (℃) | 15-35 |
| Power supply (100-240VAC) | RAD1PS |
| Expected lifetime (hours) | >10000 |



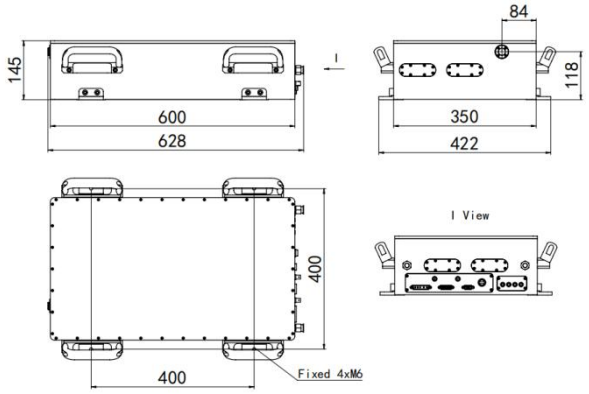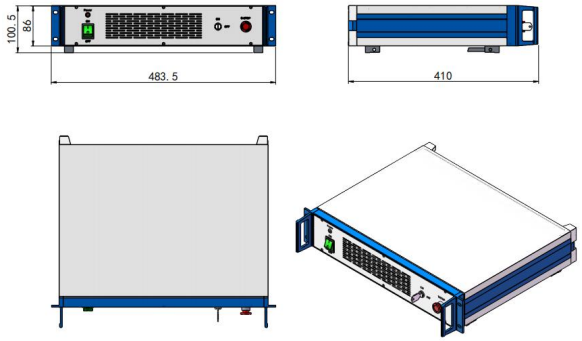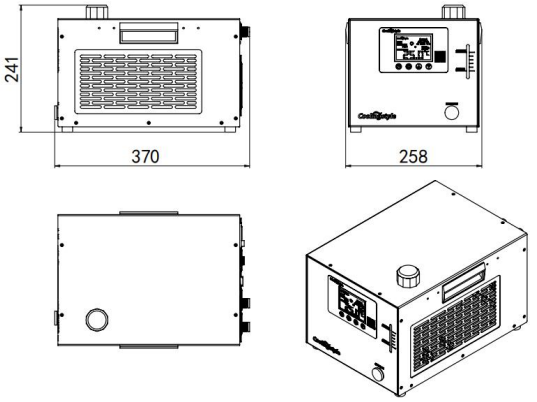


| LASER HEAD (DRIVER Integrated) | POWER SUPPLY | WATER CHILLER |
|---|---|---|
|  |  |  |
| **628 (L)×422 (W) ×145(H) mm³,40kg** | **410 (L) ×483.5 (W) ×110.5 (H) mm³,4.5 kg** | **370 (L) ×258 (W) ×241 (H) mm³,12kg** |



1 Integrated AOM for fine power control and fast power modulation.

Kokyo 株式会社 光響

Email : gs-inquiry@symphotony.com
Web : https://www.symphotony.com/