

MDL-E-460/1~100mW



**NARROW LINEWIDTH  
DIODE LASER AT 460nm**



Narrow linewidth diode laser module at 460nm is made features of narrow spectral linewidth, stable wavelength, long lifetime and easy operating, which is widely used in precision measurement, high resolution spectrum analysis, etc.



SPECIFICATIONS

Wavelength (nm)	460±5
Operating mode	CW
Output power (mW)	>1, 10, 20, ..., 100
Power stability (rms, over 4 hours)	<1%, <3%, <5%
Transverse mode	Multimode
Spectral linewidth (nm)	<0.06, <0.03(extra heatsink)
Beam diameter at the aperture (1/e <sup>2</sup> ,mm)	<2×5
Beam divergence, full angle (mrad)	<2.5×0.2
Polarization ratio	>50:1 (>100:1, optional) Horizontal±5 degree (Vertical Optional)
Warm-up time (minutes)	<15
Beam height from base plate (mm)	30
Operating temperature (°C)	20~30
Power supply (85-264VAC)	PSU-III-FDA
Expected lifetime (hours)	10000
Warranty	1 year

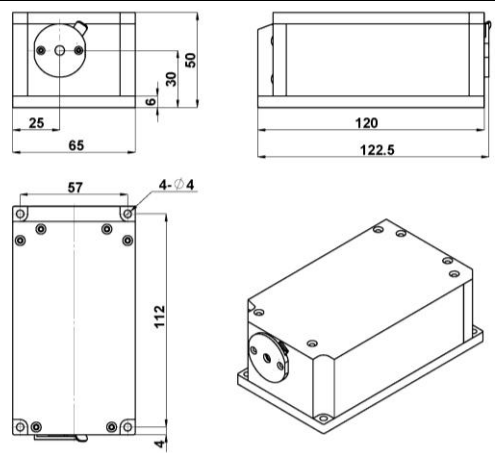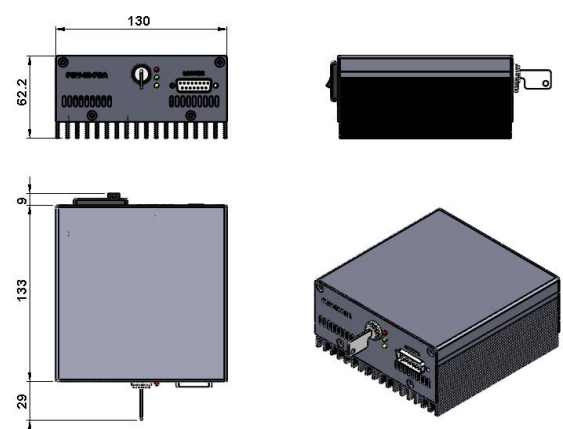

MDL-E-460	PSU-III-FDA
 <p>122.5(L) ×65(W) ×50(H) mm<sup>3</sup>, 1.0kg</p>	 <p>171(L) ×130(W) ×62.2(H) mm<sup>3</sup>, 1.2kg</p>