

MDL-III-454L/1~80mW



BLUE DIODE LASER  
AT 454nm

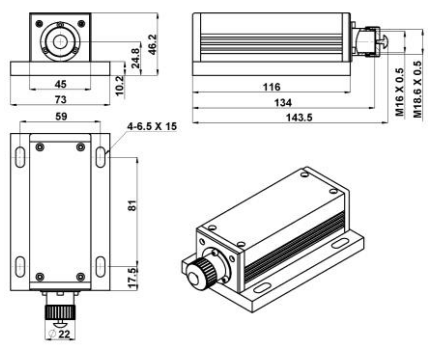
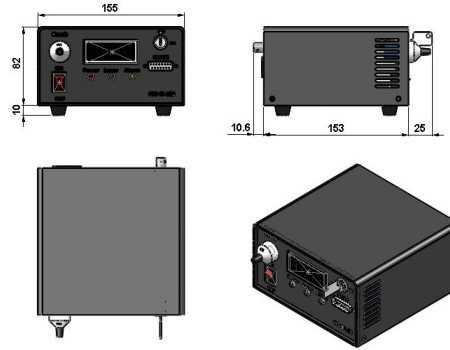
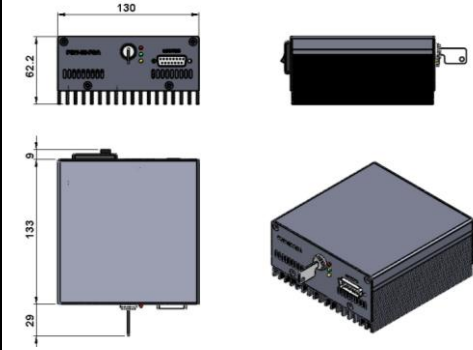

Blue diode laser module at 454nm is made features of ultra compact, long lifetime, cost-effectiveness and easy operating, which is used in scientific research, measurement, communication, spectrum analysis, etc.



SPECIFICATIONS

Wavelength (nm)	454±5	
Operating mode	CW	
Output power (mW)	>1, 10, 20, ..., 80	
Power stability (rms, over 4 hours)	<1%, <3%, <5%	
Transverse mode	Near TEM <sub>00</sub>	
M <sup>2</sup> factor	<1.5	
Beam diameter at the aperture (1/e <sup>2</sup> ,mm)	~3.5	
Beam divergence, full angle (mrad)	<1	
Polarization ratio	>50:1 (>100:1, optional) Horizontal±5 degree (Vertical Optional)	
Warm-up time (minutes)	<5	
Pointing stability after warm-up (mrad)	<0.05	
Beam height from base plate (mm)	24.8	
Operating temperature (°C)	10~35	
Power supply	85-264VAC	PSU-III-LED/ PSU-III-FDA (Frequency for 1Hz-30kHz)
	100-240VAC	PSU-A-D (Frequency for 30kHz -100kHz)
TTL / Analog modulation	TTL or Analog with 1Hz-1kHz 1kHz-10kHz, 10kHz-30kHz, 30kHz-100kHz optional	
Expected lifetime (hours)	10000	
Warranty	1 year	



MxL-III-454L	PSU-III-LED	PSU-III-FDA	PSU-A-D
 <p>143.5(L)×73(W)×46.2(H) mm<sup>3</sup>, 0.7kg</p>	 <p>188.6 (L) ×155(W) ×92 (H) mm<sup>3</sup>, 1.5kg</p>	 <p>171(L) ×130(W) ×62.2 (H) mm<sup>3</sup>, 1.2kg</p>	 <p>162(L) ×144(W) ×70 (H) mm<sup>3</sup>, 1.0kg</p>