

MLL-III-420/1~120mW




LOW NOISE VIOLET DIODE LASER AT 420nm

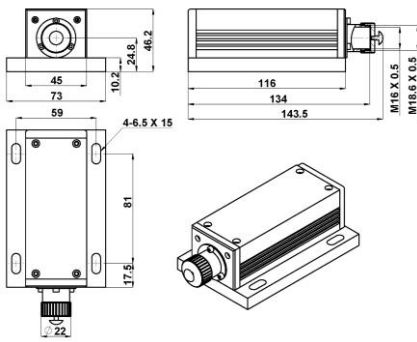
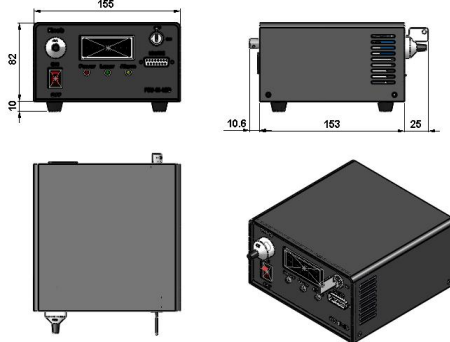
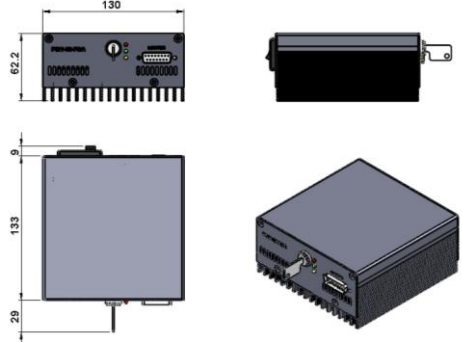
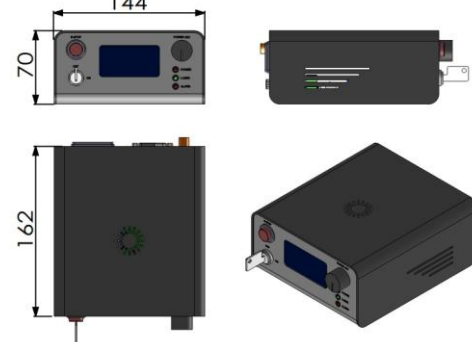
Low noise violet diode laser module at 420nm is made features of ultra compact, long lifetime, cost-effectiveness and easy operating, which is used in measurement, communication, spectrum analysis, etc.



SPECIFICATIONS

Wavelength (nm)	420±5
Operating mode	CW
Output power (mW)	>1, 10, 20, ..., 120
Power stability (rms, over 4 hours)	<1%, <3%, <5%
Transverse mode	Near TEM ₀₀
Noise of amplitude (rms, 20Hz~20MHz)	<1%
M ² factor	<1.5
Beam diameter at the aperture (1/e ² ,mm)	~2.5
Beam divergence, full angle (mrad)	0.5
Polarization ratio	>50:1 (>100:1, optional) Horizontal±5 degree (Vertical Optional)
Warm-up time (minutes)	<5
Pointing stability after warm-up (mrad)	<0.05
Beam height from base plate (mm)	24.8
Operating temperature (°C)	10~35
Power supply	85-264VAC PSU-III-LED/ PSU-III-FDA (Frequency for 1Hz-30kHz) 100-240VAC PSU-A-D (Frequency for 30kHz -100kHz)
TTL / Analog modulation	TTL or Analog with 1Hz-1kHz 1kHz-10kHz, 10kHz-30kHz, 30kHz-100kHz optional
Expected lifetime (hours)	10000
Warranty	1 year



MxL-III-420	PSU-III-LED	PSU-III-FDA	PSU-A-D
 <p>143.5(L)×73(W)×46.2(H) mm³, 0.7kg</p>	 <p>188.6 (L) ×155(W) ×92 (H) mm³, 1.5kg</p>	 <p>171(L) ×130(W) ×62.2 (H) mm³, 1.2kg</p>	 <p>162(L) ×144(W) ×70 (H) mm³, 1.0kg</p>