

OEM-SD-445/447/450/4W



**OEM BLUE DIODE LASER
AT 445/447/450nm**




OEM blue diode laser at 445/447/450 nm is made features of ultra compact, long lifetime, cost-effectiveness and easy operating. It's easy to be installed in customer's equipment.



SPECIFICATIONS

Wavelength (nm)	445±5/ 447±5/ 450±5	
Operating mode	CW	
Output power (mW)	4000	
Power stability (rms, over 4 hours) at 25°C	<1%, <3%, <5%	
Polarization direction	Horizontal/ Vertical	Horizontal+ Vertical
Beam diameter at the aperture (1/e ² ,mm)	~4.7×2.7	~2.7×2.7
Beam divergence, full angle (mrad)	~1.4×0.2	
Warm-up time (minutes)	<5	
Beam height from base plate (mm)	28.5	
Operating temperature (°C)	25+/-3	
Driver (12VDC 15A)	PSU-SD-OEM	
TTL / Analog modulation	TTL or Analog with 1Hz-1KHz 1KHz-10KHz, 10KHz-30KHz optional	
Expected lifetime (hours)	10000	
Warranty	1 year	

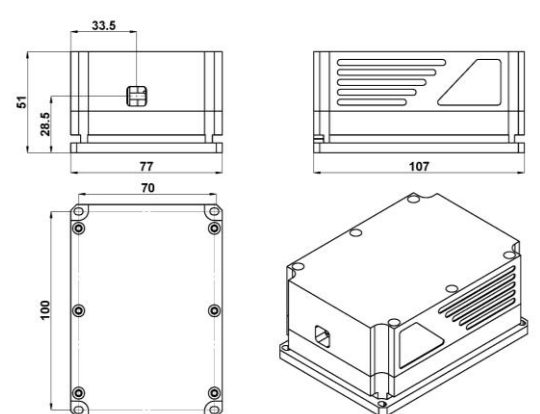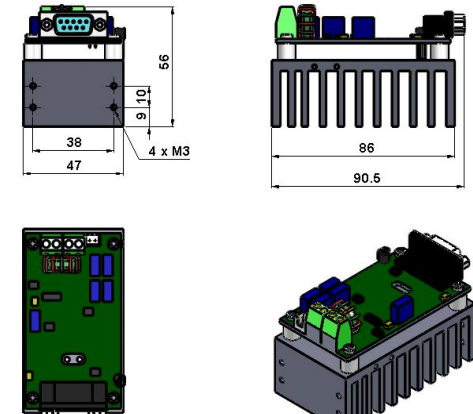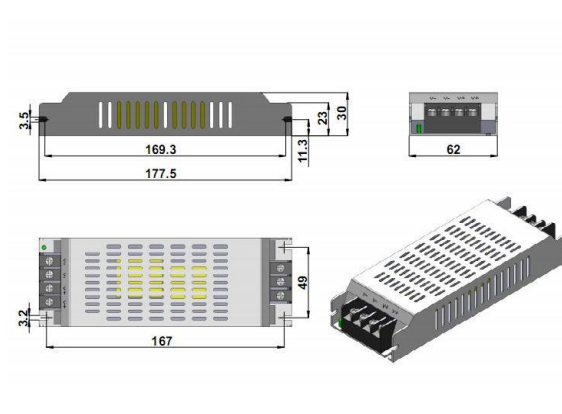

OEM-SD-445/447/450	PSU-SD-OEM	Accessory (Power supply 100-240VAC)
 <p>107(L)×77(W)×51(H) mm³, 1.0kg</p>	 <p>90.5 (L) ×47(W) ×56(H) mm³, 0.3kg</p>	 <p>177.5(L)×62(W)×30(H) mm³, 0.5 kg</p>