

MDL-N-1470/1000~3500mW



**INFRARED DIODE LASER  
AT 1470nm**





Diode infrared laser module at 1470nm is made features of ultra compact, long lifetime and easy operating, which is used in measurement, communication, spectrum analysis, etc.



SPECIFICATIONS

Wavelength (nm)	1470 ± 10		
Operating mode	CW		
Output power (mW)	>1000, 1500, 2000, ..., 3500		
Power stability (rms, over 4 hours)	<1%, <3%, <5%		
Transverse mode	Near TE <sub>00</sub>		
M <sup>2</sup> factor	<20		
Beam divergence, full angle (mrad)	<3.0		
Beam diameter at the aperture (1/e <sup>2</sup> ,mm)	5~8		
Warm-up time (minutes)	<5		
Polarization ratio	>100:1		
Beam height from base plate (mm)	68.5		
Pointing stability after warm-up (mrad)	<0.05		
Operating temperature (°C)	10~35		
Power supply (90-264VAC)	PSU-H-LED	PSU-H-FDA	PSU-N-OEM
TTL / Analog modulation	TTL or Analog with 1Hz-1KHz 1KHz-10KHz, 10KHz-30KHz optional		
Expected lifetime (hours)	10000		
Warranty period	1 year		

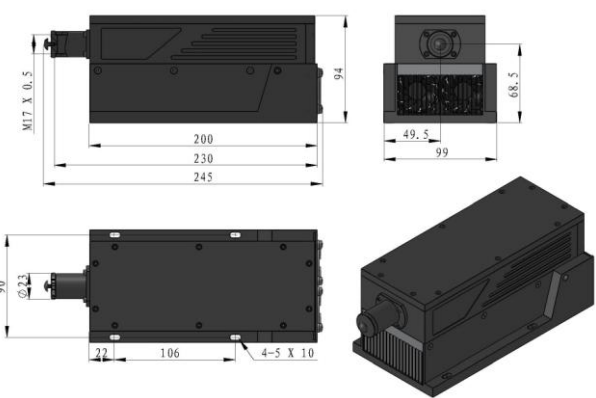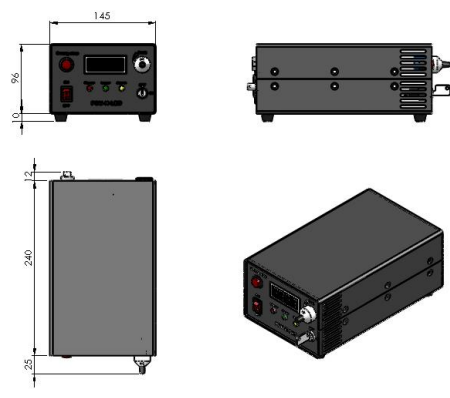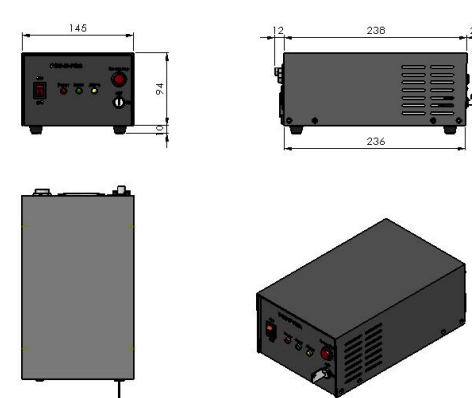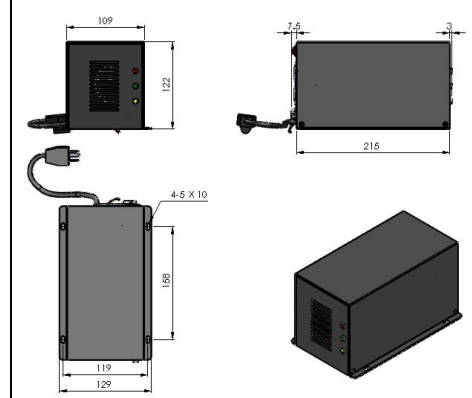

MxL-N-1470	PSU-H-LED	PSU-H-FDA	PSU-N-OEM
 <p>245(L) × 99(W) × 94(H) mm<sup>3</sup>, 2.5 kg</p>	 <p>277(L) × 145(W) × 106(H) mm<sup>3</sup>, 2.6 kg</p>	 <p>275(L) × 145(W) × 104(H) mm<sup>3</sup>, 2.4 kg</p>	 <p>215(L) × 129(W) × 122(H) mm<sup>3</sup>, 2.1 kg</p>